HFE9

MINIATURE HIGH POWER LATCHING RELAY







File No.:CQC07017019644



Features

- Latching relay
- 60A switching capability
- The relay can stand 1440A peak current for 10ms
- 4kV dielectric strength(between coil and contacts)
- Heavy load up to 15000VA
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (38.0 x 30.0 x 16.0) mm

CONTACT DATA				
Contact arrangement	1A, 1B			
Contact resistence		1mΩ max.(at 1A 24VDC)		
Contact material			AgSnO ₂	
Contact rating	60A 250VAC	50A 250VAC	40A 250VAC	
(Res. load)	50000PS	10000ops	1000000PS	
Max. switching voltage	250VAC			
Max. switching current	60A			
Max. switching power	15000VA			
Mechanical endurance	1 x 10 ⁶ ops			
Mechanical endurance	Meter: 1 x 10 ⁵ ops			
Electrical endurance	1 x 10 ⁵ ops (40A 250VAC, Resistive load,			
Licotrical cridulatice	Room temp., 1s on 9s off)			

CHARACTERISTICS				
Insulation resistance			1000MΩ (at 500VDC	
Dielectric	Between	coil & contacts	4000VAC 1min	
strength	Between	open contacts	1500VAC 1min	
Creepage	e distance		8mm	
Set time (at nomi. volt.)			20ms max.	
Reset time (at nomi. volt.)			20ms max.	
		Functional	98m/s²	
Shock res	sistance	Destructive	980m/s²	
Vibration resistance			10Hz to 55Hz 1.5mm DA	
Humidity			5% to 85% RH	
Ambient temperature			-40°C to 70°C	
Termination			Q	
Unit weight			Approx. 33	
Construction			Plastic sealed, Flux proofed	

Notes:	The	data	shown	above	are	initial	values.

COIL	
Coil power	Single coil latching: Approx. 1.0W
Ooli powei	Double coils latching: Approx. 2.0W

Coil power Single coil latching: Approximately Double coils latching: Approximately D				
COIL DA	ATA			at 23°C
Nominal Voltage VDC	Set / Reset Voltage VDC max.	Pulse width (ms) min.		sistance 0%) Ω
5	3.5	50		24

Voltage VDC	Voltage VDC max.	width (ms) min.		10%) Ω	
5	3.5	50		24	
6	4.2	50	Single coil latching Double coils latching	35	
9	6.3	50		80	
12	8.4	50		145	
24	16.8	50		575	
48	33.6	50		2270	
5	3.5	50		12+12	
6	4.2	50		17.5+17.5	
9	6.3	50		40+40	
12	8.4	50		72+72	
24	16.8	50		285+285	
48	33.6	50		1135+1135	

Notes: When requiring other nominal voltage, special order allowed.

SAFETY APPROVAL RATINGS				
UL/CUL	40A 250VAC at 70°C			
	50A 250VAC at 70°C			
	60A 250VAC at 70°C			


Notes: Only some typical ratings are listed above. If more details are required, please contact us.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2016 Rev. 1.00

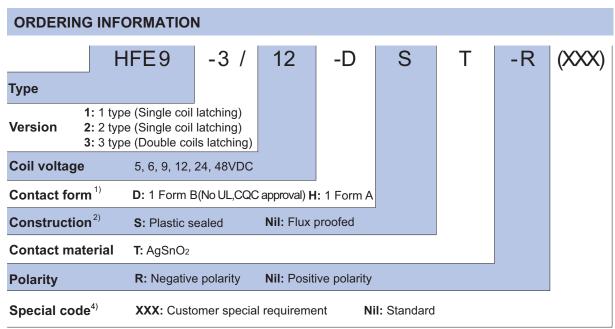


Notes: 1) Hmeans that relay is on the "reset" status when delivery; D means that relay is on the "set" status when delivery. If no speical required by customer, we will keep the relay on the "set" status when delivery.

- 2) If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.
- 3) We can make special design according to customer's requirement. Please see the typical design.
- 4) The customer special requirement express as special code after evaluating by Hongfa.


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Outline Dimensions

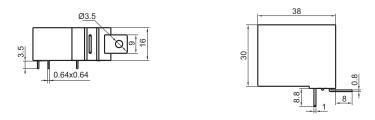


PCB Layout (Bottom view)

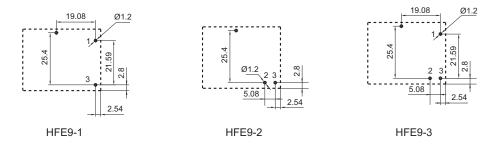


Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.

The tolerance without indicating for PCB layout is always ±0.1mm.

Wiring Diagram (Bottom view)

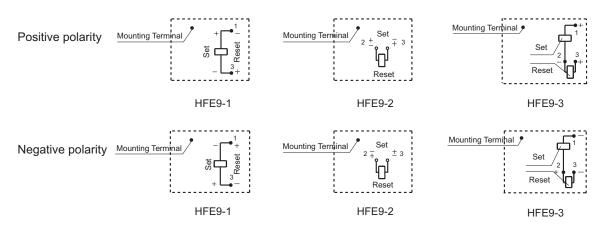

Typical Design

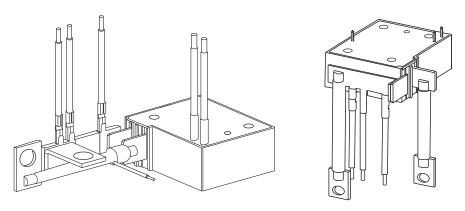

Remark: The drawing shown above are typical design, we can make special design according to customer's requirement. Please provide us with the drawing.

Notice:

- 1. When choose the relay with PCB termination, the recommended welding temperature range and duration is 240°C to 260°C, 2s to 5s; Please do not use the reflow welding method, if the reflow is really required, please contact our technicals; the normal recommeded wave soldering temperature is 250°C within 2s.
- 2. Relay is on the "reset" or "set" status when being released from stock, with the consideration of shock risen from transit and relay mounting, relay would be changed to "set" or "reset" status, therefore, when application (connecting the power supply), please reset the relay to "set" or "reset" status on request.
- 3. In order to maintain "set" or "reset" status, energized voltage to coil should reach the rated voltage, impulse width should be 5 times more than "set" or "reset" time. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.
- 4. The terminals of relay without twisted copper wire can not be tin-soldered, can not be moved willfully.
- 5. Relays used for metering measuring applications are usually made with dust proof structure, while most relays could be made specially per customer's specific requirements. No longer than 6 months' storage time is recommended for this kind of relay, and please pay attention to the storage environment. To ensure contact reliability, we will keep contact status be closed when delivery if no special required by customer.

Disclaimer

The specification is for reference only. Specifications subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.